



产 品 规 格 书

Product Specification Sheet

TOP-BIDI-1.25G-120AD/BD

RoHS Compliant 1.25G 1550/1490nm(1490/1550nm) 120KM Transceiver



Email: asale@topsf.com





PRODUCT FEATURES

- Up to 1.25Gb/s data links
- DFB laser transmitter
- APD receiver
- Up to 120KM on 9/125μm SMF
- Hot-pluggable SFP footprint
- BIDILC/UPC type pluggable optical interface
- Low power dissipation
- Metal enclosure, for lower EMI
- RoHS compliant and lead-free
- Single +3.3V power supply
- Support Digital Diagnostic Monitoring interface
- Compliant with SFF-8472
- Case operating temperature: 0°C to +70°C

APPLICATIONS

- Switch to Switch Interface
- Fast Ethernet
- Switched Back plane Applications
- Router/Server Interface
- Other Optical Links

STANDARD


- SFP+MSA Compliant
- SFF-8472 revision 9.5 compliant
- IEEE 802.3-2005 compliant
- Telcordia GR-468-CORE compliant
- FCC 47 CFR Part 15, Class B compliant
- FDA 21 CFR 1040.10 and 1040.11, class 1 compliant
- RoHS compliant



PRODUCT DESCRIPTIONS

TOP-BIDI-1.25G-120AD/BD optical transceivers are designed for optical interfaces for data communications with single mode fiber(SMF). The transceiver designs are optimized for high performance and cost effective to supply customers the best solutions for telecom applications.

FUNCTIONAL DIAGRAM

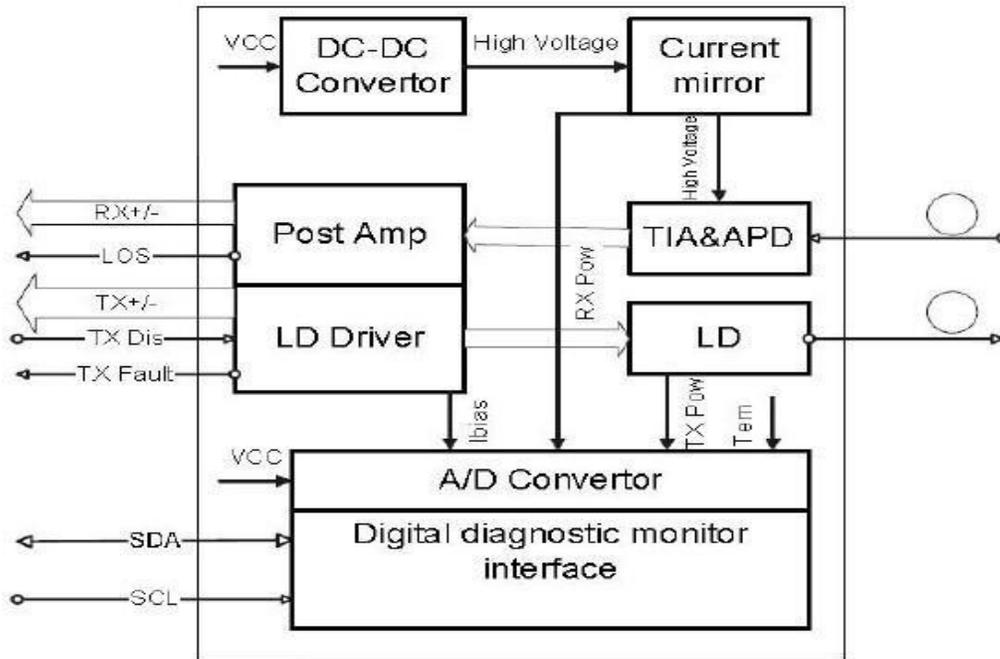

Ordering information

Table with 7 columns: Product part Number, Data Rate(Mbps), Media, Wavelength(nm), Transmission Distance(km), Temperature Range (Tcase) (°C), and a sub-column for commercial status.

**ABSOLUTE MAXIMUM RATINGS**

Parameter	Symbol	Min.	Max.	Unit	Note
Supply Voltage	V _{cc}	-0.5	4.0	V	
Storage Temperature		-40	85	°C	
Relative Humidity		5	95	%	

Note: Stress in excess of the maximum absolute ratings can cause permanent damage to the module

GENERAL OPERATING CHARACTERISTICS

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Data Rate			1.25		Gb/s	
Supply Voltage	V _{cc}	3.13	3.3	3.47	V	
Supply Current	I _{ccs}			300	mA	
Operating Case Temp.	T _c	0		70	°C	TOP-BIDI-1.25G-120AD/BD

ELECTRICAL INPUT/OUTPUT CHARACTERISTICS**Transmitter**

Parameter	Symbol	Min.	Type	Max.	Unit	Note
Diff. input voltage swing		120		820	mV _{pp}	1
Tx Disable input	H	V _{IH}	2.0		V _{cc} +0.3	V
	L	V _{IL}	0		0.8	
Tx Fault output	H	V _{OH}	2.0		V _{cc} +0.3	V
	L	V _{OL}	0		0.8	
Input Diff. Impedance	Z _{in}			100	Ω	

Receiver

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Diff. output voltage swing		340	650	800	mV _{pp}	3
RxLOS Output	H	V _{OH}	2.0		V _{cc} +0.3	V
	L	V _{OL}	0		0.8	

Note1)TD+/- are internally AC coupled with 100Ω differential termination inside the module.

Note2)Tx Fault and RxLOS are open collector outputs, which should be pulled up with 4.7kto10kΩ resistors on the host board. Pull up voltage between 2.0VandV_{cc}+0.3V.

Note3)RD+/- outputs are internally AC coupled, and should be terminated with100Ω(differential)at the user



OPTICAL CHARACTERISTICS

Transmitter

Parameter	Symbol	Min.	Type	Max.	Unit	Note
Operating Wavelength	λ_C	1270	1310	1360	nm	
		1500	1550	1570		
Ave. output power(Enabled)	P_o	0		5	dBm	1
Extinction Ratio	ER	9			dB	1
RMS spectral width	$\Delta\lambda$			4	nm	
Rise/Fall time(20%~80%)	T_r/T_f			0.26	ps	2
Output Eye Mask	TelcordiaGR-253-COREandITU-TG.957compatible					

Note (1): Measure at 2²³-1 NRZPRBS pattern

Note (2): Transmitter eye mask definition

Receiver

Parameter	Symbol	Min.	Type	Max.	Unit	Note
Operating Wavelength		1530	1550	1570	nm	
		1270	1310	1360		
Sensitivity	P_{sen}			-31	dBm	3
Min. overload	P_{imax}	-10			dBm	
LOS Assert	P_a	-40			dBm	
LOS De-assert	P_d			-33	dBm	
LOSHysteresis	$P_d - P_a$	0.5		6	dB	

Note 1) Measured at 10.3125Gb/s with PRBS231-1 NRZ test pattern.

Note 2) Under the ER worst case, measured at 10.3125Gb/s with PRBS231-1 NRZ test pattern for BER < 1x10⁻¹²

Digital Diagnostic Functions

TOP-BIDI-1.25G-120AD/BD transceivers support the 2-wire serial communication protocol as defined in the SFPMSA. It is very closely related to the E2PROM defined in the GBIC standard, with the same electrical specifications.

The standard SFP serial ID provides access to identification information that describes the transceiver's capabilities, standard interfaces, manufacturer, and other information.

Additionally, TOPSTAR SFP transceivers provide a unique enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alert send-users when particular operating parameters are outside of a factory set normal range.




The SFPMSA defines a 256-byte memory map in E2PROM that is accessible over a 2-wireserial interface at the 8 bit address1010000X(A0h).The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X(A2h), so the originally defined serial ID memory map remains unchanged. The interface is identical to, and is thus fully backward compatible with both the GBIC Specification and the SFP Multi Source Agreement.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller(DDTC) inside the transceiver, which is accessed through a 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL,ModDef1) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of the E2PROM that are not write-protected. The negative edge clocks data from the SFP transceiver.

The serial data signal(SDA,ModDef2) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.

Digital diagnostics for the TOP-BIDI-1.25G-120 are Internally calibrated by default.

Pin Definitions and Functions

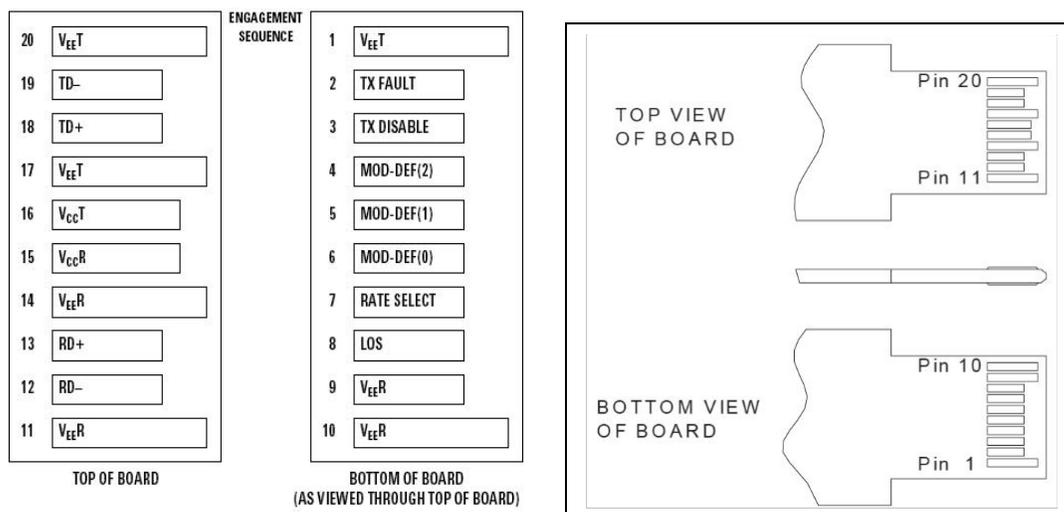



PIN #	Name	Function	Notes
1	VeeT	Module transmitter ground	Note1
2	Tx Fault	Module transmitter fault	Note 2
3	Tx Disable	Transmitter Disable; Turns off transmitter laser output	Note 3
4	SDL	2 wire serial interface data input/output (SDA)	
5	SCL	2 wire serial interface clock input (SCL)	
6	MOD-ABS	Module Absent, connect to VeeR or VeeT in the module	Note 2
7	RS0	Rate select0, optionally control SFP+ receiver. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s	
8	LOS	Receiver Loss of Signal Indication	Note4
9	RS1	Rate select0, optionally control SFP+ transmitter. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s	
10	VeeR	Module receiver ground	Note 1
11	VeeR	Module receiver ground	Note 1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	Note 1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	Note 1
18	TD+	Transmitter inverted data out put	
19	TD-	Transmitter non-inverted data out put	
20	VeeT	Module transmitter ground	Note1


Note1)The module ground pins shall be isolated from the module case.

Note2)This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohmsto Host_Vcc on the host board.

Note3)This pin shall be pulled up with 4.7K-10Kohmsto VccT in the module.


Note4)In FC designated as RX_LOS, in SONET designated as LOS, and in Ethernet designated at Signal Detect.

TYPICAL INTERFACE CIRCUIT

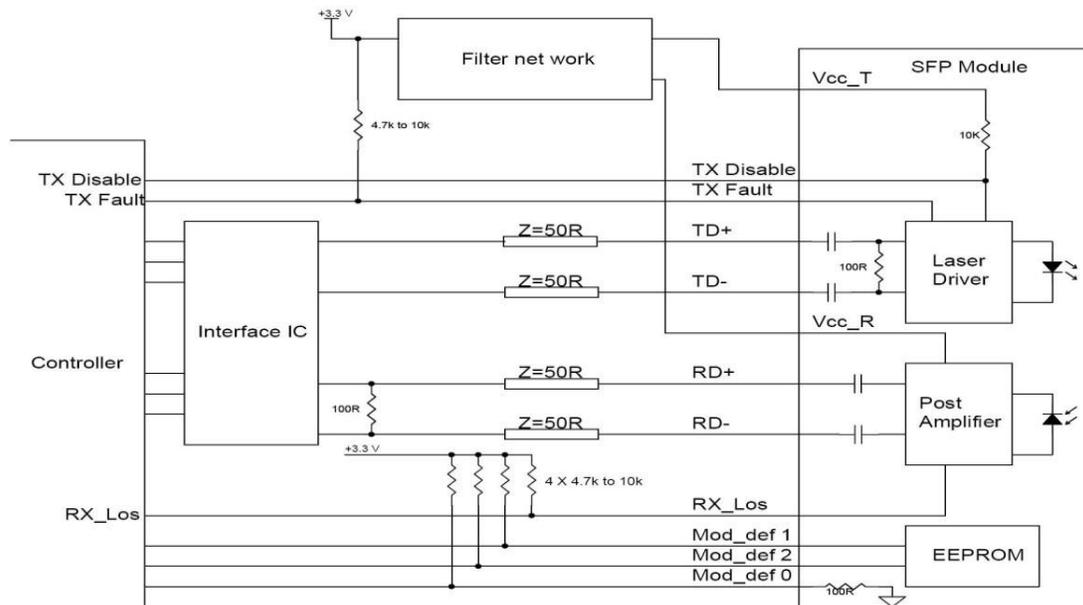




Recommended power supply filter

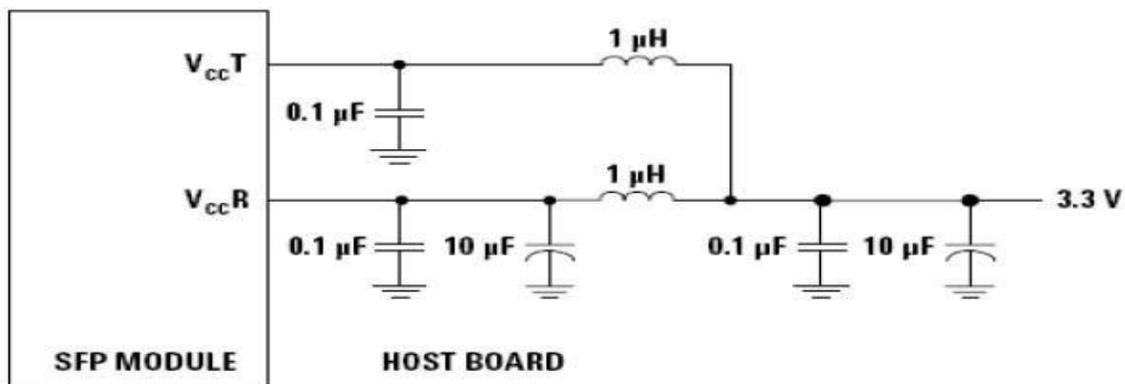

Note: Inductors with DC resistance of less than 1Ω should be used in order to maintain the required voltage at the SFP input pin with 3.3V supply voltage. When the recommended supply filtering network is used, hot plugging of the SFP transceiver module will result in an inrush current of no more than 30mA greater than the steady state value

PACKAGE DIMENSIONS

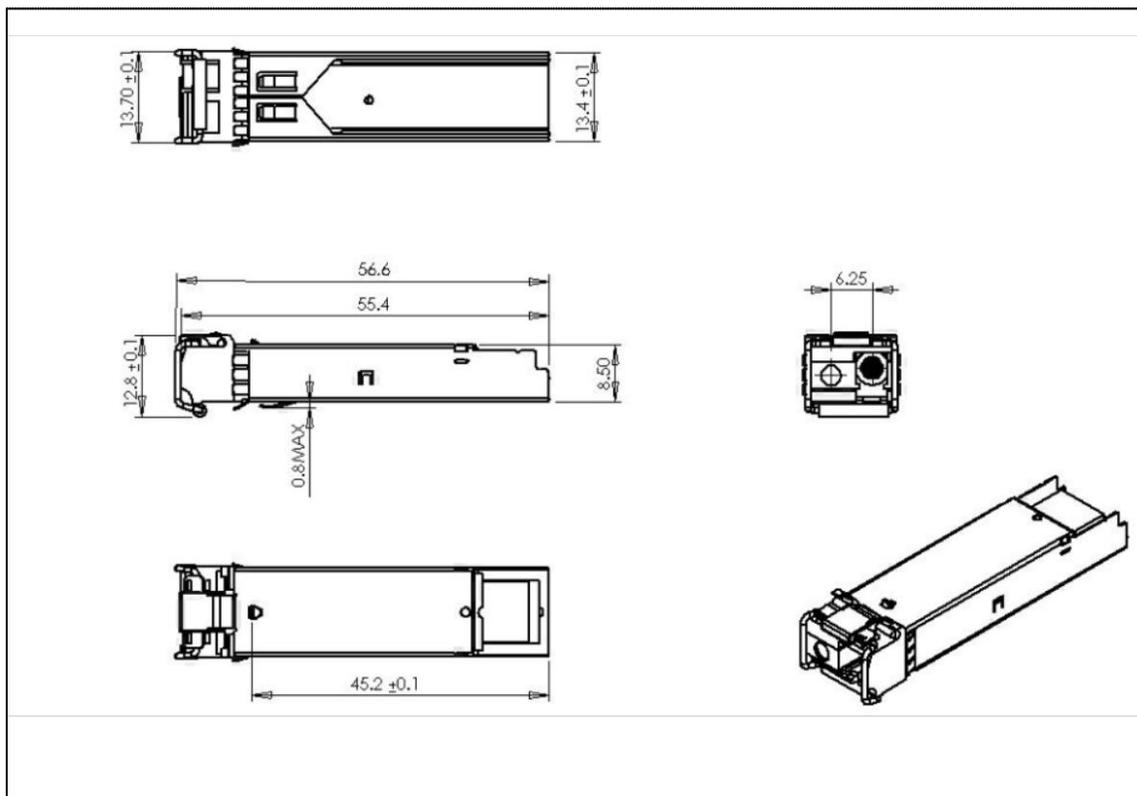



TOPSTAR TECHNOLOGY INDUSTRIAL CO., LIMITED

Topstar Technology Industrial Co., Ltd

**Add: F5, Rongcheng Building, 28 Yayuan Road Wuhe Community,
BanTian Street, Shenzhen, China**

Tel: +86 755 8255 2969 Email:lisa@topsfp.com

Skype: lisalin6565 Whatsapp: +86 13798265065

Wechat: 251081707

Facebook and Linked in: Topstar Technology Industrial Co., Ltd

