



TOPSTAR TECHNOLOGY INDUSTRIAL CO., LIMITED

产品规格书

Product Specification Sheet

TOP-SFP-2.5G-40D

RoHS Compliant 2.5Gbps 1550nm 40KM Single mode Optical Transceiver



E-MAIL: lisa@topsfp.com





Product Features

- Transceiver unit with independent
- DFB laser transmitter and PIN photo-detector
- Multi-rate operation, optimized at 2.488Gb/s
- Upto 40KM transmission distance on 9/125μm SMF
- Standard serial ID information compliant with SFPMSA
- SFPMS A package with duplex LC connector
- Digital Diagnostic Monitor Interface
- Very low EMI and excellent ESD protection
- +3.3V single power supply
- RoHS compliant
- Case operating temperature
- Commercial: 0°C to +70°C Extended: -10°C to +80°C Industrial: -40°C to +85°C

Applications

- Switch/Router
- SAN/Server
- Fiber Channel
- Other optical transmission systems

Standard


- SFPMSA (Version Sept. 14 2000) compliant
- SFF-8472 (Rev 9.3, Aug. 2002) Digital Diagnostic Monitoring Interface for Optical Transceivers compliant
- ITU-TG 957 and G 958 compliant
- Telcordia GR-253-CORE compliant
- Telcordia GR-468-CORE compliant
- FCC Part 15, Class B



Description

SFP 2.5G 40KM 1550nm single mode optical transceivers are optimized for STM-16/OC-48 optical interface for telecom applications. They are designed for Multi-rate operation. The transceivers are optimized for high performance and cost effective to supply customers the best solutions for telecom applications.

Functional Diagram

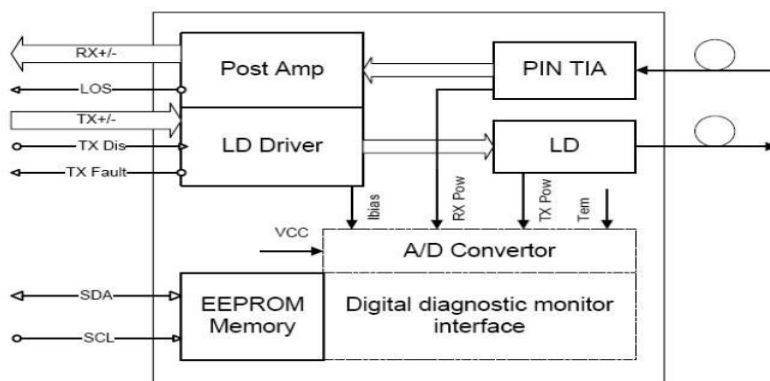

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max	Unit	Notes
Supply Voltage	Vcc	-0.5	3.60	V	
Storage Temperature		-40	85	°C	
Relative Humidity		5	95	%	

Note: Stress in excess of the maximum absolute ratings can cause permanent damage to the module.

General Operating Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Data Rate			2.488		Gb/s	
Supply Voltage	Vcc	3.1	3.3	3.5	V	
Supply Current	Icc			270	mA	



Operating Case Temperature	Tc	0	70	°C
		-10	80	
		-45	85	

Electrical Input/Output Characteristics

• Transmitter

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Diff.InputVoltageSwing		300		1800	mVpp	1
TxDisableInput	H	VIH	2.0	Vcc+0.3	V	
	L	VIL	0	0.8		
TxFault Output	H	VOH	2.0	Vcc+0.3	V	2
	L	VOL	0	0.5		
InputDiff.Impedance	Zin		100		Ω	

• Receiver

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Diff.OutputVoltageSwing		400		1000	mVpp	1
RxLOS Output	H	VOH	2.0	Vcc+0.3	V	2
	L	VOL	0	0.8		

Note1)AC-Coupled CML logic family.

Note2)TxFault and RxLOS are open collector outputs,which should be pulled up with 4.7k to 10kΩohm resistors on the host board. Pull up voltage between 2.0V and Vcc+0.3V.

Optical Characteristics

• Transmitter

Parameter	Symbol	Min.	Type	Max.	Unit	Notes
Ave.OutputPower (Enable)	P	-2		3	dBm	1
Sidemode Suppression Ratio	SMSR	30			dB	



ExtinctionRatio	ER	8.2			dB	1
WavelengthRange	λ_c	1530	1550	1570	nm	
SpectralWidth(RMS)	$\Delta\lambda$			1	nm	
OutputOptical Eye	ITU-TG.957 Compliant					

●Receiver

Parameter	Symbol	Min.	Type	Max.	Unit	Notes
Operating Wavelength		1260		1620	nm	
Sensitivity	P _{imin}			-27	dBm	3
Min. Overload	P _{imax}	0			dBm	3
LOSAssert	Pa	-35			dBm	
LOSDe-assert	Pd			-28	dBm	
LOSHysteresis	Pd-Pa	0.5		6	dB	


Note1) Measured at 2488Mb/s with PRBS2²³-1NRZ test pattern.

Note2) Meet the specified maximum output jitter requirements if the specified maximum input

jitter is present. Note3) Measured at 2488 Mb/s with PRBS2²³-1NRZ test pattern for

BER < 1x10⁻¹⁰

Pin Definitions and Functions

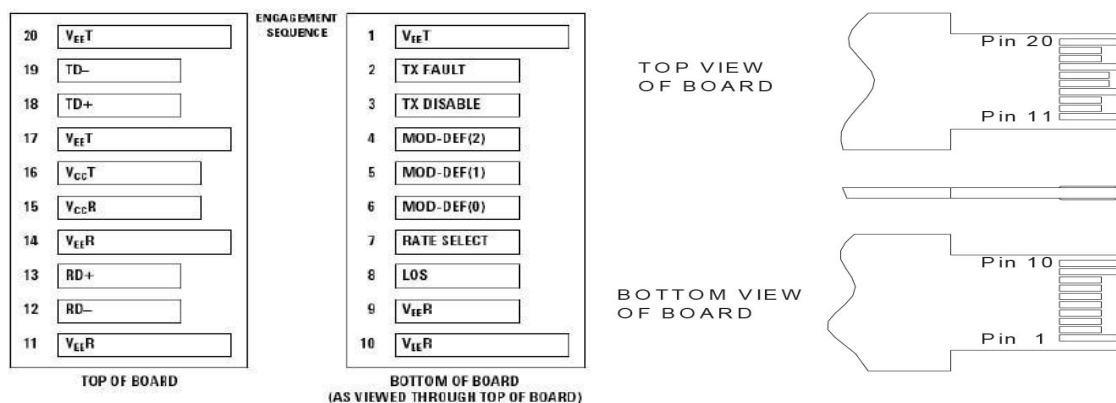



PIN #	Name	Function	Notes
1	VeeT	Tx ground	
2	Tx Fault	Txfaultindication,OpenCollectorOutput,active“H”	Note1
3	TxDisable	LVTTLInput,internalpull-up,Txdisabledon“H”	Note2
4	MOD-DEF2	2wireserialinterfacedatainput/output(SDA)	Note3
5	MOD-DEF1	2wireserialinterfaceclockinput(SCL)	Note3
6	MOD-DEF0	Modelpresentindication	Note3
7	Rateselect	Noconnection	
8	LOS	Rxlossofsignal,OpenCollectorOutput,active“H”	Note4
9	VeeR	Rxground	
10	VeeR	Rxground	
11	VeeR	Rxground	
12	RD-	Inversereceiveddataout	Note5
13	RD+	Receiveddataout	Note5
14	VeeR	Rxground	
15	VccR	Rxpower supply	
16	VccT	Txpowersupply	
17	VeeT	Tx ground	
18	TD+	Transmitdatain	Note6
19	TD-	Inversetransmitdatain	Note6
20	VeeT	Tx ground	

Note1) When high, this output indicates a laser fault of some kind. Low indicates normal operation. And should be pulled up with a 4.7 –10KΩresistor on the host board.

Note2)TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7–10KΩ resistor. Its states are:

Low(0–0.8V): Transmitter on (>0.8,<2.0V): Undefined

High(2.0V~Vcc+0.3V): Transmitter Disabled Open: Transmitter Disabled

Note3)Mod-Def0,1,2.These are the module definition pins. They should be pulled up with a 4.7K–10KΩresistor on the host board. The pull-up voltage shall be between 2.0V~Vcc+0.3V. Mod-Def0 has been grounded by the module to indicate that the module is present

Mod-Def1 is the clock line of two wire serial interface for serial ID

Mod-Def2 is the data line of two wire serial interface for serial ID


Note4)When high, this output indicates loss of signal (LOS).Low indicates normal operation.

Note5)RD+/-: These are the differential receiver outputs. They are AC coupled100Ωdifferential lines which should be terminated with 100Ω(differential)at the user SERDES. The AC coupling is done inside the module and is thus not required on the host board.




Note6)TD+/-:These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module.The AC coupling is done inside the module and is thus not required on the host board.

Typical Interface Circuit

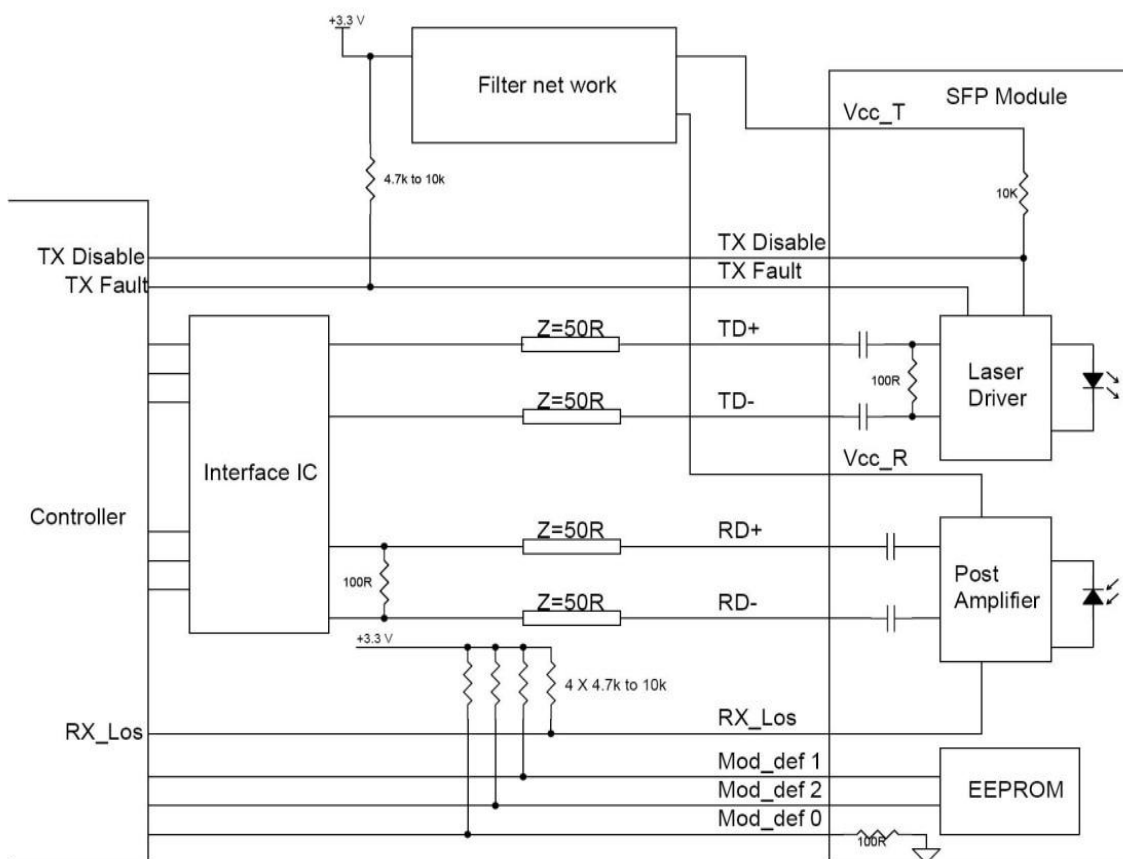




Recommended power supply filter

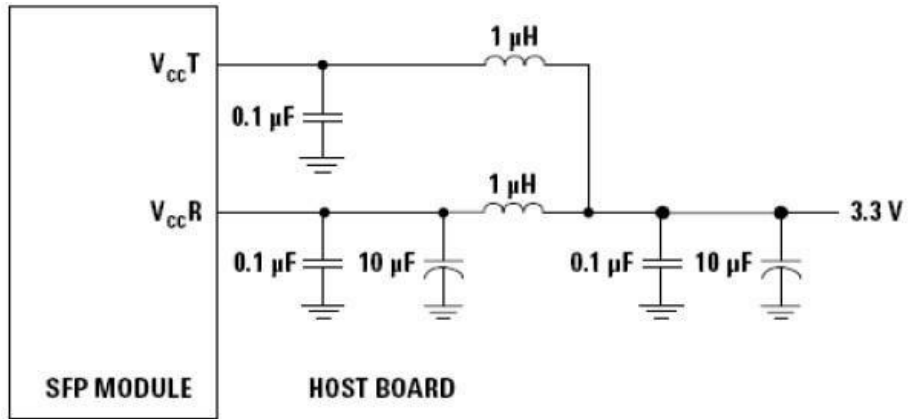

Note: Inductors with DC resistance of less than 1Ω should be used in order to maintain the required voltage at the SFP input pin with 3.3V supply voltage. When the recommended supply filtering network is used, hot plugging of the SFP transceiver module will result in an inrush current of no more than 30 mA greater than the steady state value.

Package Dimensions

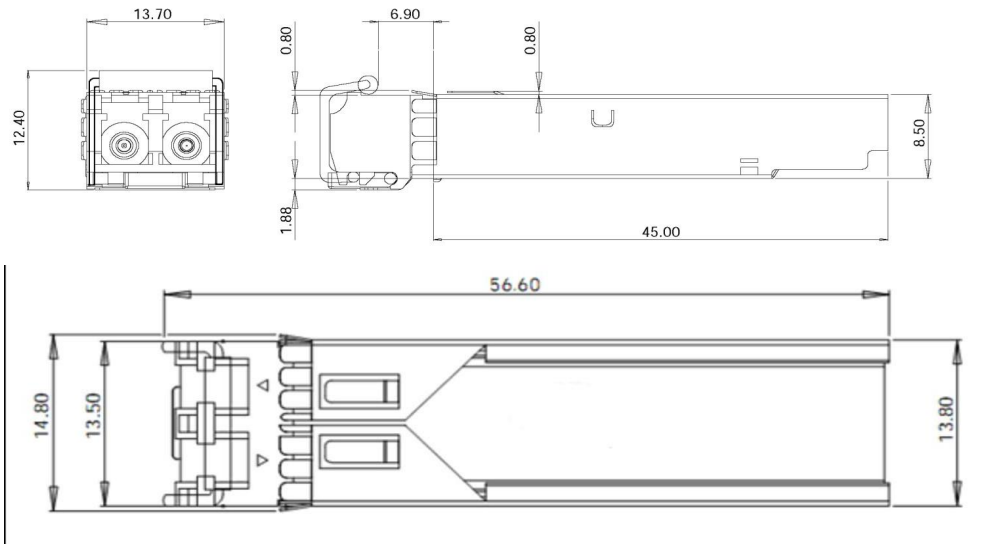



Ordering information

Productpart Number	Data Rate (Mbps)	Media	Wavelength (nm)	Transmission Distance(m)	TemperatureRange (Tcase) (°C)	
TOP-SFP-2.5G-40 c	2500	Single mode fiber	1550	40	0~70	commercial
TOP-SFP-2.5G-40 e	2500	Single mode fiber	1550	40	-10~80	extended
TOP-SFP-2.5G-40 i	2500	Single mode fiber	1550	40	-45~85	industrial



TOPSTAR TECHNOLOGY INDUSTRIAL CO., LIMITED

Topstar Technology Industrial Co., Ltd

**Add: F5, Rongcheng Building, 28 Yayuan Road Wuhe Community,
BanTian Street, Shenzhen, China**

Tel: +86 755 8255 2969 Email: lisa@topsfp.com

Skype: [lisalin6565](https://www.skype.com/people/lisalin6565) Whatsapp: +86 13798265065

Wechat: 251081707

Facebook and Linked in: Topstar Technology Industrial Co., Ltd

